





SOFT HOUSE WRAP

MEDIUM DUTY SB-1002

PRODUCT INFORMATION

Soft house wrap helps protect a house against strong wind and heavy rain that can penetrate through the exterior cladding. The unique polymer woven structure of soft house wrap blocks excess water from entering into the wall. The breathable structure of soft house wrap allows moisture vapour to pass through to help promote drying wall system which can aid in preventing the growth of mold and mildew. Our reinforced woven is much stronger than any other breathable sheet and it helping to provide a more energy efficient home.

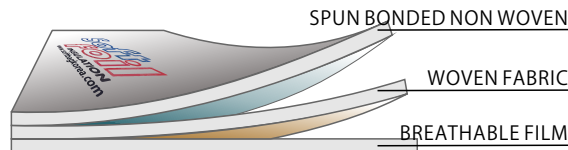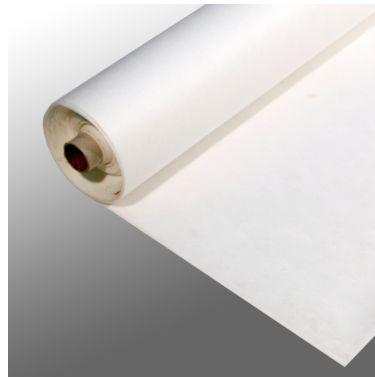

click to
MSDS

SOFT HOUSE WRAP

MEDIUM DUTY SB-1002



PHYSICAL CHARACTERISTICS

Description	Parameter	Test Method
Tensile strength Machine Direction	5.9 kN/m	ASTM D4595
Tensile strength Lateral Direction	4.1 kN/m	
Water Vapour Permeability	6,392 g/m ² /24h	ASTM E96
Water barrier (resistance)	164 cm H ₂ O	AATCC 127
Air permeability	Below 0.1cm ³ /cm ² /s	ASTM D737
Burst strength	229N	AS 2001.2.19
Dimensional stability to washing	Length : -3.5%	AS 2001.5.4
	Width : -3.5%	
Width : 1350mm/ 1500mm		
Color : White, Green, Blue		
Weight : 95GSM		

SOFTBAG KOREA CO.,LTD.

6FL, Shingang Bldg,
67, Seongsui-ro,
Seongdong-gu,
Seoul, KOREA

Tel. 82-2-462-1401

Fax. 82-2-462-1402

Email: kenny@softbagkorea.com

click to
Contact us