






SOFT FOIL

BOTH REFLECTIVE / SF-2001(PP)

PRODUCT INFORMATION

Our double side soft foil have a high-fire retardant resistance bonded with a fire retardant adhesive to the woven polymesh. Also our double side soft foil has high reflective surface and good thermal insulation and vapour control layer.

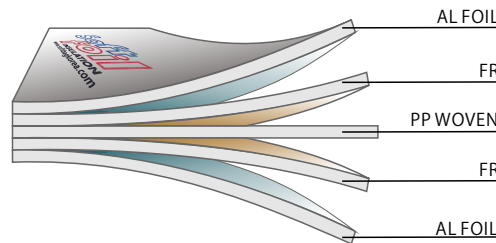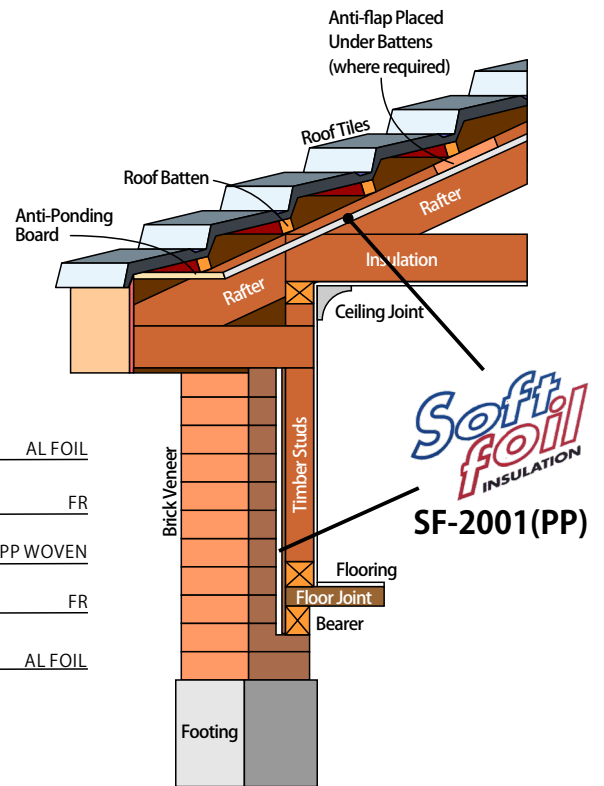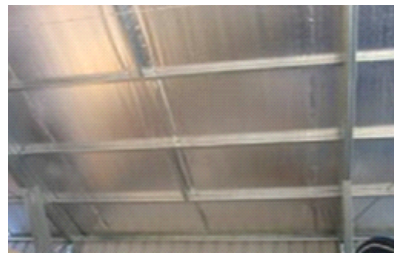

click to
MSDS

**SOFT
FOIL
BOTH
REFLECTIVE
SF-2001(PP)**



PHYSICAL CHARACTERISTICS

Description	Parameter	Test Method
Reflectivity	97%	AS/NZS 4201.5
Emissivity	0.03	ASTM E408
Water resistance	>100mm	AATCC 127
Flammability index	<5	AS 1530.2
Tensile strength Machine Direction	>13.0 kN/m	ASTM D4595
Tensile strength Lateral Direction	>10.5 kN/m	
Edge tear resistance	90	TAPPI T470
Air barrier	High	
Shrinkage	<2%	AS 1736(AS/NZS 4201.3)
Width : 1350mm/1500mm		
Color : Glare (Both side glare)		
Weight : 120±5GSM		

SOFTBAG KOREA CO.,LTD.

6FL, Shingang Bldg,
67, Seongsui-ro,
Seongdong-gu,
Seoul, KOREA
Tel. 82-2-462-1401
Fax. 82-2-462-1402

Email: kenny@softbagkorea.com

click to
Contact us