



# SOFT GLASS FIBER




## HEAVY DUTY SF-5001

### PRODUCT INFORMATION

Soft-Glass fiber(No-clad) is designed as a cost effective alternative to cladding of pipe and duct insulation to prevent mechanical damage. It differs from standard Soft-Glass fiber in that the aluminium foil is a puncture resistant multilayer.

- A salt water resistant, UV and weather durable coating.
- The aluminium foil is reinforced with a ultra coating, twill weave of glass fiber.

Although designed to be resistant to mechanical damage, Soft-Glass fiber has been designed for easy fabrication using sharp knives.

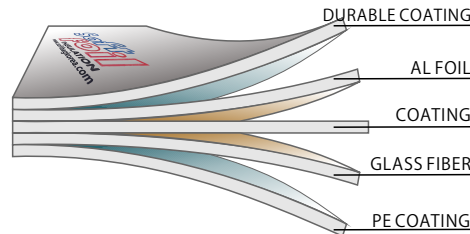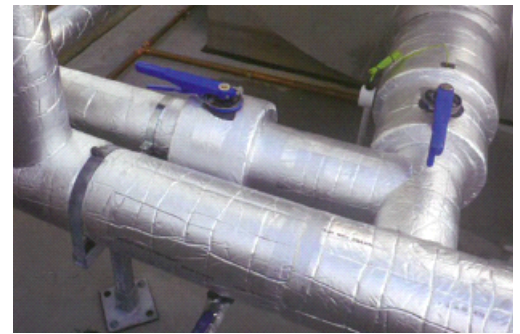

click to  
MSDS

## SOFT GLASS FIBER HEAVY DUTY SF-5001



### PHYSICAL CHARACTERISTICS

Description	Parameter	Test Method
Tensile strength Machine Direction	>8.75 kN/5cm	ASTM D4595
Tensile strength Lateral Direction	>8.5 kN/5cm	
Edge Tear Resistance Machine Direction	>40N	TAPPI T470
Edge Tear Resistance Lateral Direction	>40N	
UV & Weathering (3000 hr QUV exposure)	Excellent	ISO 4892-3
Salt resistance (2week immersion in 5% salt solution)	No visible change	
Water vapour permeability	High	ASTM E96
Water vapour permeance 12mm thickness	High	
Resistance to fungi	Zero Growth	ASTM G21
Ozone resistance	Excellent	
Operating temperature	-80°C to 100°C	
Fire and smoke behavior	Class 0	BS 476 Part 6&7
Ignitability index	0	AS 1530.3
Smoke develop index	0-1	AS 1530.3
Width : 1250mm		
Weight : 305GSM		

SOFTBAG KOREA CO.,LTD.

6FL, Shingang Bldg,  
67, Seongsui-ro,  
Seongdong-gu,  
Seoul, KOREA  
Tel. 82-2-462-1401  
Fax. 82-2-462-1402

Email: kenny@softbagkorea.com

click to  
Contact us