




SOFT ALPET

HIGH ADHESIVE (GR) SF-7005



PRODUCT INFORMATION

The SOFT ALPET(high adhesive-GR) gives excellent water barrier and fire proof properties. SOFT ALPET(high adhesive-GR) provides strong stickness, good peel strength, high tensile strength, great aging resistance, reflective to sunshine and solar heat. It is easy to laminate with fiber glass wool and rubber material and also prevent dust and moisture from penetrating.

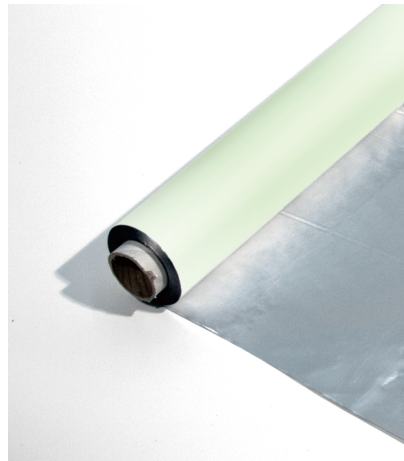

click to
MSDS

SOFT ALPET HIGH ADHESIVE (GR) SF-7005

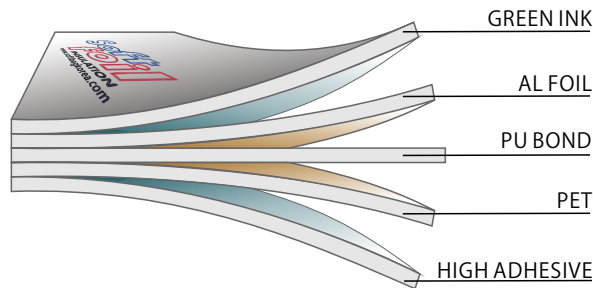

PHYSICAL CHARACTERISTICS

Description	Parameter	Test Method
Vapour barrier	High	ASTM E96
Emissivity	0.03	ASTM E408
Reflectivity	97%	AS/NZS 4201.5
Tensile strength Machine Direction	210N/5cm	ASTM D4595
Tensile strength Lateral Direction	280N/5cm	
Edge tear resistance Machine Direction	370N	TAPPI T470
Edge tear resistance Lateral Direction	420N	
Width : 1355mm		
Color : Green		
Weight : 56GSM		

SOFTBAG KOREA CO.,LTD.

6FL, Shingang Bldg,
67, Seongsui-ro,
Seongdong-gu,
Seoul, KOREA

Tel. 82-2-462-1401

Fax. 82-2-462-1402

Email: kenny@softbagkorea.com

click to
Contact us