




# SOFT TPP SHEET

## SOFT TPP SHEET

### PRODUCT ADVANTAGE

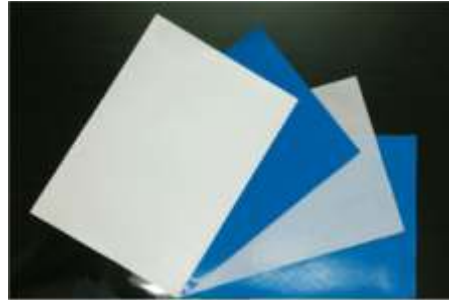

1. Chemical resistance (resistant to acid)
2. Excellent adhesion
3. Soft hardness
4. Abrasion resistance is above 1000 cycles
5. Resistance to salinity
6. Easy usability than P.V.C
7. High water resistance & Air tightness
8. High durability to low & high temperature

### SIZE AVAILABILITY

Denier	SPEC
420D	16 X 16 (White / Blue)
500D	18 X 18 (White / Blue)
1000D	20 X 20 (White / Blue)

### TECHNICAL DATA

Description	TPP SHEET (White)	TPP SHEET (Blue)
Thickness : (DIN 53353)	0.31mm	0.33mm
Mass : (DIN 53352)	254.4g/m <sup>2</sup>	300.5g/m <sup>2</sup>
Tensile strength (DIN 53354)	WARP 1015.2N/5cm WEFT 1308.6N/5cm	WARP 1155.2N/5cm WEFT 1319.0N/5cm
Elongation : (DIN 53354)	WARP 21.5% WEFT 20.6%	WARP 26.5% WEFT 22.5%
Tearing strength : (DIN 53363)	WARP 310.9N WEFT 405.6N	WARP 284.6N WEFT 276.6N
Tensile strength : (DIN 53354)	409.3N/5cm IN JOINING AREA	665.6N/5cm IN JOINING AREA
Flexing resistance to low temperature : (ASTM D2136)	NO CRACK (Test condition: -30°C, 4h)	NO CRACK (Test condition: -30°C, 4h)
Dimensional stability to heat: (Client's request method)	WARP -0.5% WEFT -0.1% (Test condition : (90±2°C,24h)	WARP -0.5% WEFT -0.3% (Test condition : (90± °C,24h)
Pencil hardness : (ASTM D3363)	LESS THAN 6B	LESS THAN 6B

#### SOFTBAGKOREA CO.,LTD.

6FL, Shin Gang Bldg,  
67, Seong Sui-Ro,  
Sung Dong-gu,  
Seoul, KOREA  
Tel. 82-2-462-1401  
Fax. 82-2-462-1402

Email: [kenny@softbagkorea.com](mailto:kenny@softbagkorea.com)

click to  
Contact us